



PIN	DESC
1	NC
2	NC
3	NC
4	NC
5	LEDA
6	VSS
7	VDD
8	SCK
9	SDA
10	RS
11	RST
12	CS

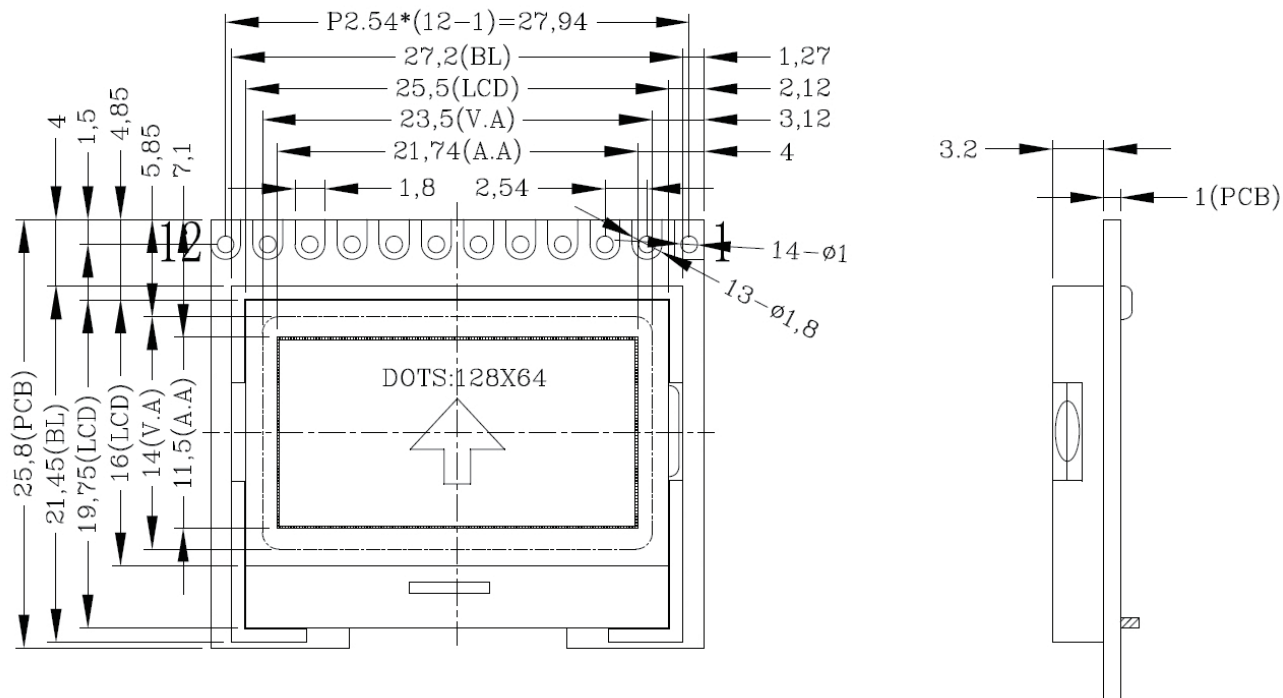

说明:

1. LCM包括LCD、BACKLIGHT、FPC、IC;
2. LCM工作电压VDD=3.3V;
3. 工作温度-20~+70摄氏度;
4. 储存温度-30~+80摄氏度;
5. 视角为6点钟;
6. LCD驱动条件为1/64Duty, 1/9Bias, Vop=8.2V;
7. 背光是一颗LED侧背光, 3.0V, 8~20mA;
8. LCD底色白底黑字。
9. IC型号: UC1701X
10. 连接方式: COG(Chip On Glass)



REVISION RECORD		DATE	Radiant-way Technology Inc.		
1	第1版		TITLE: LCD OUTLINE DIMENSION		未标注公差为: ±0.2
2			Model No: RDB12864G-181-BN		PEG(3)
3			Part No: LCM		VER: A
4	DRAWN		DATE	2021/11/16	SHEET 1/1
5	CHECKED		DATE		UNIT: mm
6	APPROVED		DATE		SCALE 1:1