


接口定义:

PIN	DESC
1	XVO
2	VO
3	VG
4	VDD
5	VSS
6	SDA
7	SCLK
8	CSB
9	AO
10	RSTB

电路框图

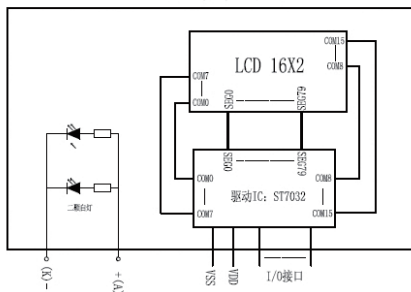

说明:

- 1.LCM包括LCD、BACKLIGHT、IC;
- 2.LCM工作电压VDD=3.3V;
- 3.储存温度-30~+80摄氏度;
- 4.工作温度-20~+70摄氏度;
- 5.视角为6点钟;
- 6.LCD驱动条件为1/17Duty, 1/4Bias;
- 7.背光为白色2颗LED背光灯;
- 8.IC型号: ST7032S

REVISION RECORD	DATE	Radiant-way Technology Inc.	
1		TITLE: LCD CUTLINE DIMENSION	
2		Model No: RDB1602G-916	PEG(3)
3		Part No: LCM	VER: A
4		DRAWN	DATE 2019/2/18 SHEET 1/1
5		CHECKED	DATE 2020/1/7 UNIT: mm
6		APPROVED	DATE SCALE 1:1