



正面图

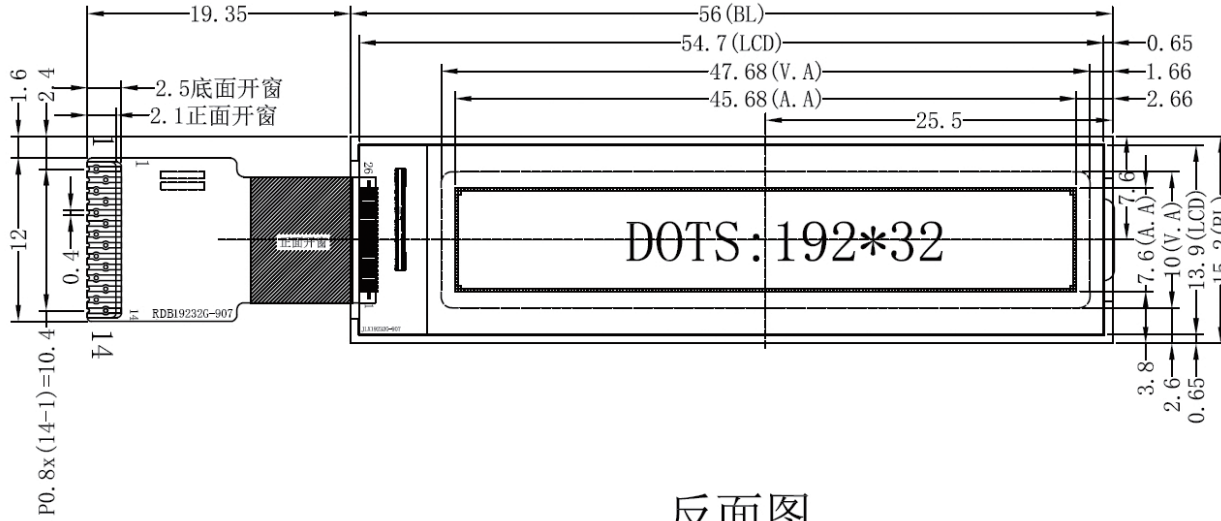



侧面图

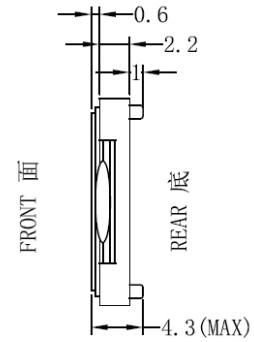

引脚定义:

PIN	DESC
1	LEDK
2	LEDA
3	VLCD
4	VB1+
5	VB1-
6	VBO+
7	VBO-
8	VSS
9	VDD
10	SDA
11	SCK
12	RS
13	RST
14	CS0


反面图

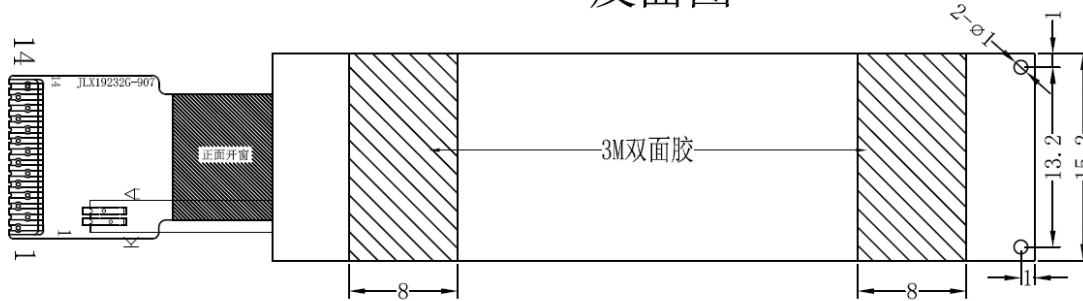

说明:

- 1.LCM包括LCD、BACKLIGHT、FPC、IC;
- 2.LCM工作电压VDD=3.3V;
- 3.工作温度-20~+70摄氏度;
- 4.储存温度-30~+80摄氏度;
- 5.视角为6点钟;
- 6.LCD驱动条件为1/32Duty, 1/7Bias,Vop=6.5V;
- 7.背光为白色2颗LED侧背光, 3.0V, 16~30mA;
- 8.LCD底色白底黑字或蓝底白字。
- 9.IC型号: UC1604C
- 10.连接方式: COG(Chip On Glass)

电路框图

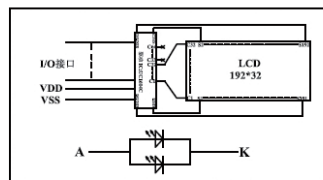

REVISION RECORD		DATE	Radiant-way Technology Inc.		
1			TITLE:LCD CUTLINE DIMENSION		
2			Model No:RDB19232G-907	PEG (3)	
3			Part No: FOG+BL	VER:	A
4			DRAWN	DATE	2019/05/30
5			CHECKED	DATE	
6	常规公差: ±0.2mm		APPROVED	DATE	
				SHEET	1/2
				UNIT:	mm
				SCALE	1:1