

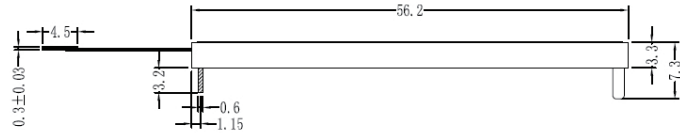
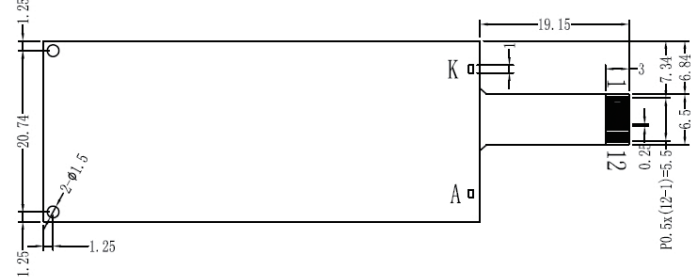
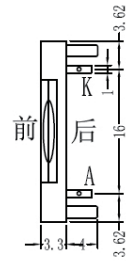


正面图

侧面图

背面图

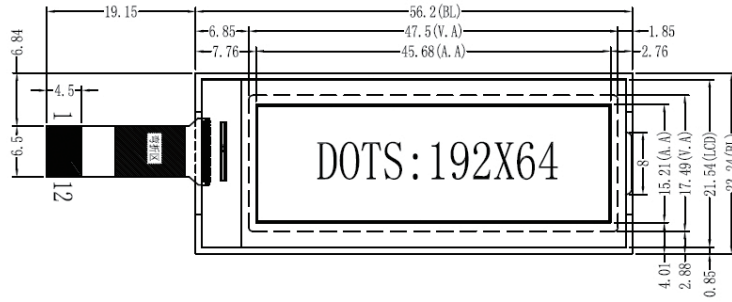


接口定义:

PIN	DESC
1	VLCD
2	VBI+
3	VBI-
4	VBO+
5	VBO-
6	VSS
7	VDD
8	SDA
9	SCK
10	CD (RS)
11	RST
12	CS0 (CS)

说明:

- 1.LCM包括LCD、BACKLIGHT、FPC、IC;
- 2.LCM工作电压VDD=3.3V;
- 3.工作温度-20~+70摄氏度;
- 4.储存温度-30~+80摄氏度;
- 5.视角为6点钟;
- 6.LCD驱动条件为1/64Duty, 1/9Bias;
- 7.背光为白色2颗LED侧背光, 3.0V, 16~30mA;
- 8.LCD底色白底黑字。
- 9.IC型号: UC1604c
- 10.连接方式: COG(Chip On Glass)

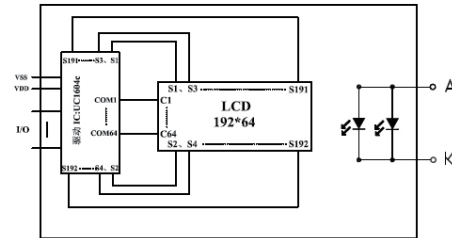

REVISION RECORD		DATE	Radiant-way Technology Inc.			
1		TITLE:LCD OUTLINE DIMENSION				
2		Model No:RDB19264G-33302-BN			PEG	⌀
3		Part No: LCM		VER:	A	
4		DRAWN	DATE	2017-12-8	SHEET	1/1
5		CHECKED	DATE	2023-9-6	UNIT:	mm
6		APPROVED	DATE		SCALE	1:1