


接口定义:

PIN	DESC	PIN	DESC
1	CSB	24	V1
2	RSTB	25	MV1
3	A0	26	MV2
4	RWR	27	AVDD
5	ERD	28	CA1P
6	D0	29	CA1N
7	D1	30	CA2P
8	D2	31	CA2N
9	D3	32	CD1P
10	D4	33	CD1N
11	D5	34	NVDD
12	D6	35	CD2N
13	D7	36	CD2P
14	VSS1	37	MV3
15	IF2	38	CB1N
16	IF1	39	CB1P
17	IF0	40	V3
18	VD1	41	CE1P
19	VDD	42	CE1N
20	VDD	43	CE3P
21	VSS	44	CE2N
22	VC	45	CE2P
23	V2	46	VOU


说明:

- 1.LCM包括LCD、BACKLIGHT、FPC、IC;
- 2.LCM工作电压VDD=3.3V;
- 3.工作温度-20~+70摄氏度;
- 4.储存温度-30~+80摄氏度;
- 5.视角为6点钟;
- 6.LCD驱动条件为1/240Duty, 1/16Bias;
- 7.背光为白色6颗LED侧背光, 3.0V, 48~90mA;
- 8.LCD底色白底黑字。
- 9.IC型号: ST75320
- 10.连接方式: COG(Chip On Glass)


正面图

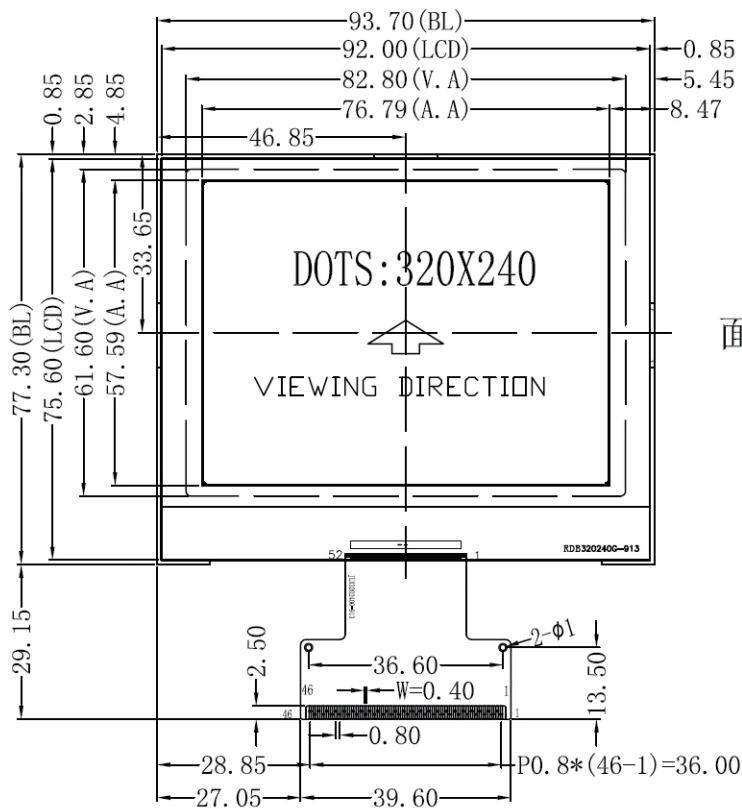


侧面图

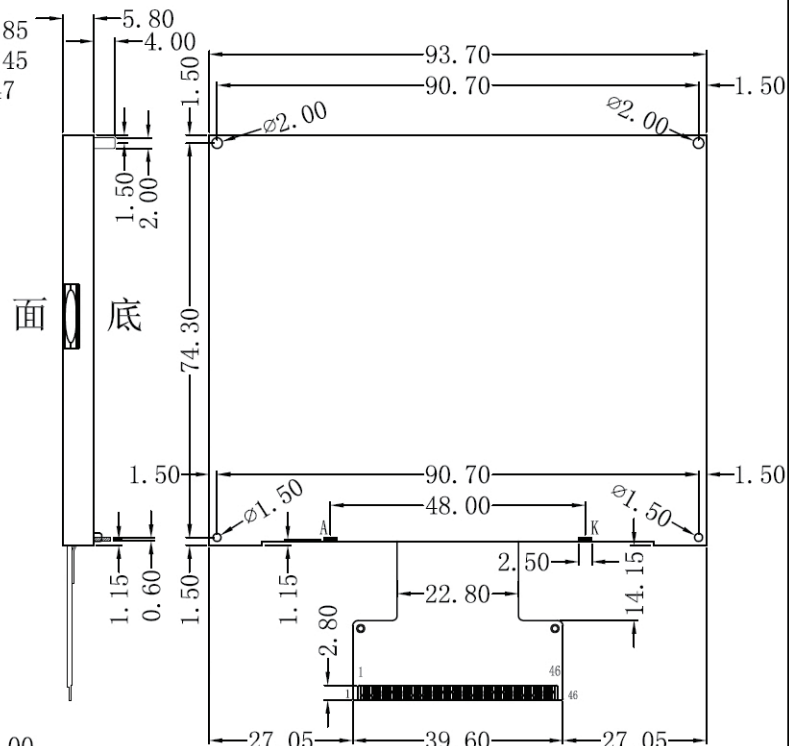

反面图



电路框图

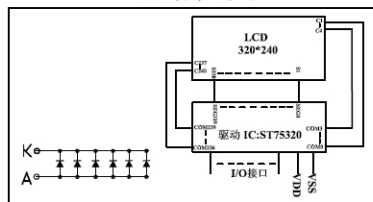

REVISION RECORD	DATE	Radiant-way Technology Inc.			
1		TITLE:LCD CUTLINE DIMENSION			
2		Model No:RDB320240G-913-BN		PEG(3)	
3		Part No: FOG+BL		VER:	A
4		DRAWN	DATE	2019/01/04	SHEET 1/1
5		CHECKED	DATE		UNIT: mm
6		APPROVED	DATE		SCALE 1:1