

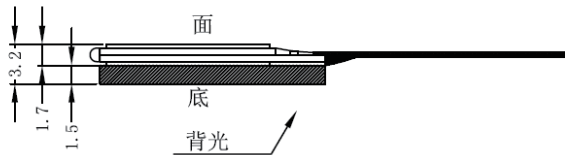


正面图

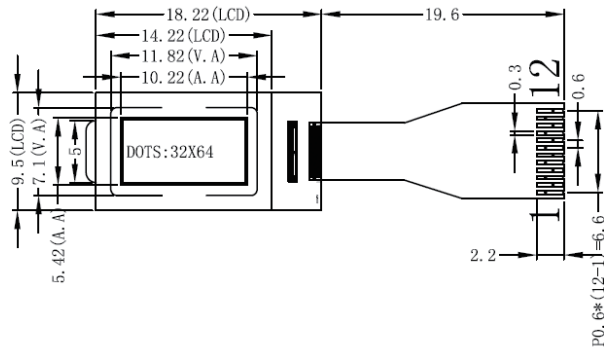


反面图

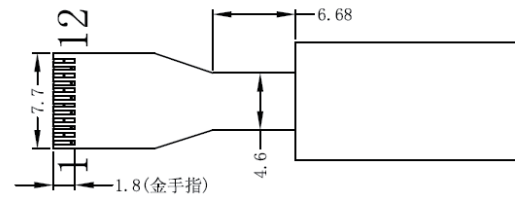

接口定义:


PIN	DESC
1	LEDA
2	LEDK
3	VLCD
4	VB1+
5	VB1-
6	VSS
7	VDD
8	SDA
9	SCK
10	CD
11	RSTB
12	CS0

电路框图

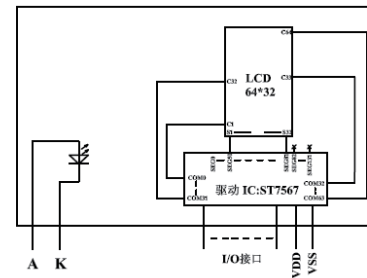

说明:

- 1.LCM包括LCD、BACKLIGHT、FPC、IC;
- 2.LCM工作电压VDD=3.3V;
- 3.工作温度-20~+70摄氏度;
- 4.储存温度-30~+80摄氏度;
- 5.视角为6点钟;
- 6.LCD驱动条件为1/65Duty, 1/9Bias,Vop=8.2V;
- 7.背光为白色1颗LED侧背光, 3.0V, 8~15mA;
- 8.LCD底色:黑底白字。
- 9.IC型号: ST7567
- 10.连接方式: COG(Chip On Glass)



REVISION RECORD		DATE	Radiant-way Technology Inc.		
1	FIRST		TITLE:LCD CUTLINE DIMENSION		
2			Model No:RDB6432G-53002-BN	PEG (3)	
3			Part No: LCM	VER:	3.0
4		DRAWN	DATE	2018/04/28	SHEET 1/1
5		CHECKED	DATE		UNIT: mm
6		APPROVED	DATE		SCALE 1:1