
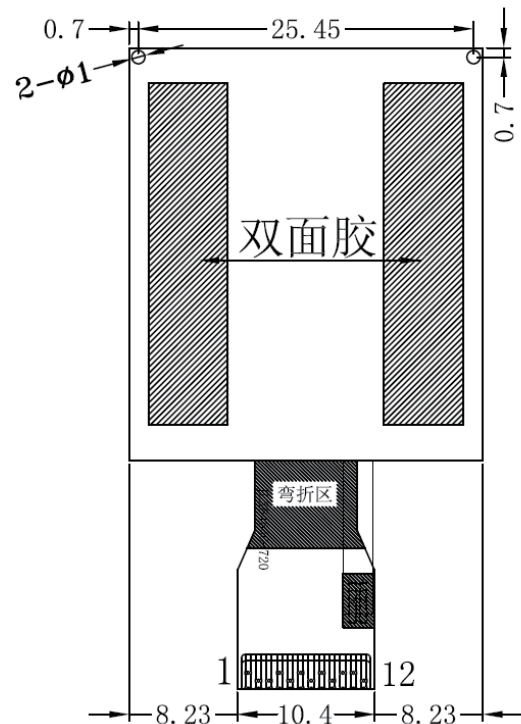


面 底

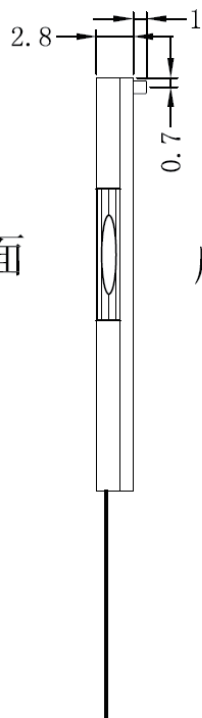


接口定义:

1	2	3	4	5	6	7	8	9	10	11	12
CS	RST	A0	SCK	SDA	VDD	VSS	V0	XV0	VG	LEDA	LEDK

说明:

- 1.LCM包括LCD、BACKLIGHT、FPC、IC;
- 2.LCM工作电压VDD=3.3V;
- 3.工作温度-20~+70摄氏度;
- 4.储存温度-30~+80摄氏度;
- 5.视角为6点钟;
- 6.LCD驱动条件为1/64Duty, 1/9Bias,Vop=8.2V;
- 7.背光为白色2颗LED侧背光, 3.0V, 16~30mA;
- 8.LCD底色白底黑字。
- 9.IC型号: ST7567
- 10.连接方式: COG(Chip On Glass)

电路框图



REVISION RECORD		Radiant-way Technology Inc.				
A					PEG (3)	
B		Model No: RDB6464G-720-BN			VER:	B
C		Part No: FOG+BL			DATE	2018/01/25
D		DRAWN		DATE	SHEET	1/1
E		CHECKED		DATE	UNIT:	mm
F		APPROVED		DATE	SCALE	1:1