




正面图

侧面图



背面图

接口定义:

1	CSB
2	RST
3	A0
4	SCK
5	SDA
6	VDD
7	VSS
8	V0
9	XV0
10	VG
11	LEDA
12	LEDK

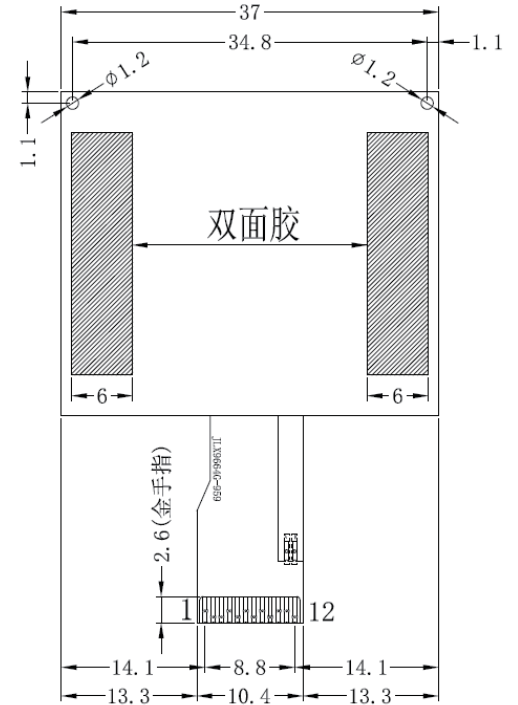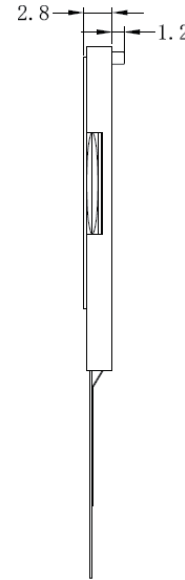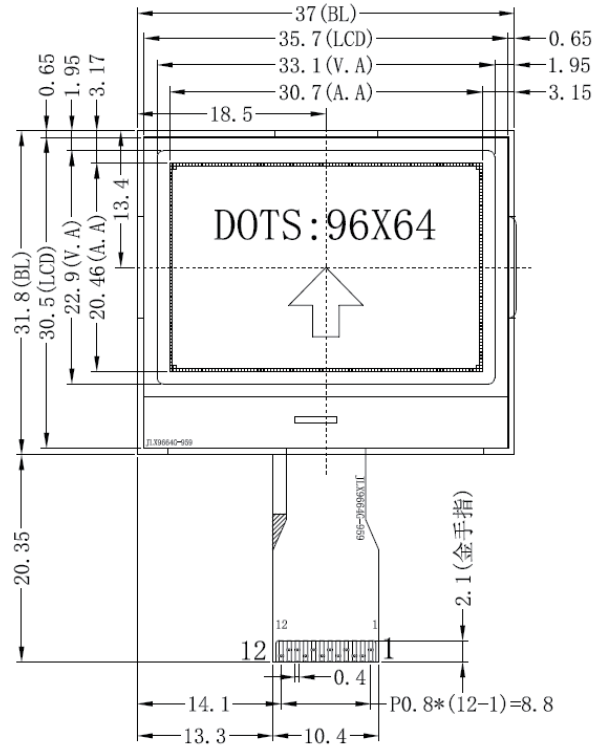

电路框图



说明:

- 1.LCM包括LCD、BACKLIGHT、FPC、IC;
- 2.LCM工作电压VDD=3.3V;
- 3.工作温度-20~+70摄氏度;
- 4.储存温度-30~+80摄氏度;
- 5.视角为6点钟;
- 6.LCD驱动条件为1/64Duty, 1/9Bias,Vop=8.2V;
- 7.背光为白色2颗LED侧背光, 3.0V, 16~40mA;
- 8.LCD底色白底黑字或蓝底白字。
- 9.IC型号: ST7567A
- 10.连接方式: COG(Chip On Glass)

REVISION RECORD		Radiant-way Technology Inc.			
A	FIRST.				未注公差为: ±0.2
B		Model No: RDH9664G-959-BN		PEG(3)	
C		Part No: FOG+BL		VER:	A
D	DRAWN		DATE	2021/07/03	SHEET 1/2
E	CHECKED		DATE		UNIT: mm
F	APPROVED		DATE		SCALE 1:1