
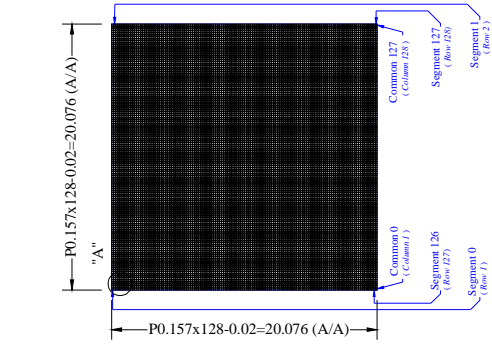


CONFIDENTIAL

Item	Date	Remark
A	20151104	Original Drawing

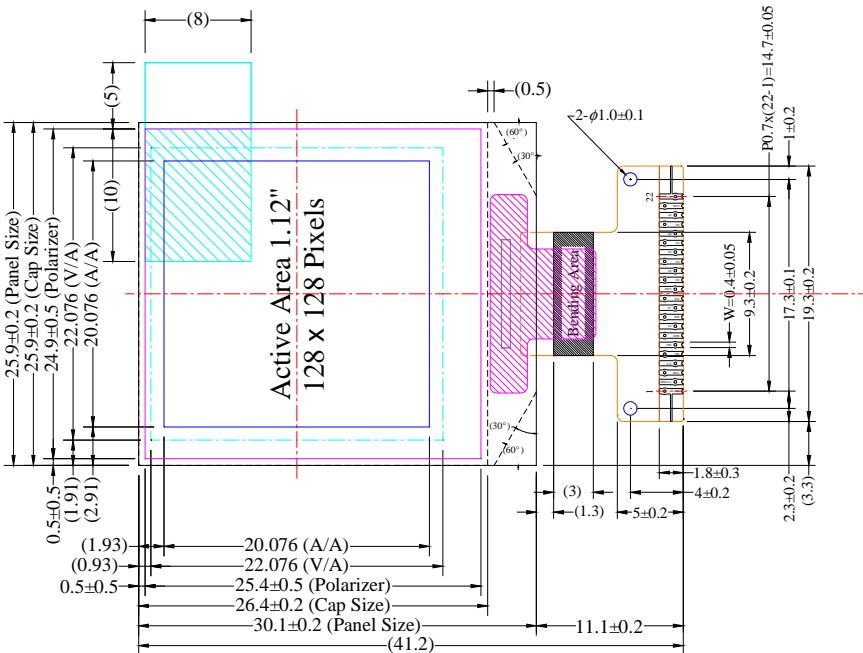

11	WR	11	Pin	Symbol
12	E/RD	12	1	VPP
13	D0	13	2	VCOMH
14	D1	14	3	VDD
15	D2	15	4	N.C.
16	D3	16	5	IM1
17	D4	17	6	IM2
18	D5	18	7	IREF
19	D6	19	8	CS
20	D7	20	9	RES
21	GND	21	10	A0
22	N.C.	22	11	WR

Customer Approval		Signature		Date		By		E.E.		Panel / E.		Date		20151104		20151104		20151104		P.M.	
Title		mm		Unit		General Roughness		Tolerance		Dimension		Angle		±		±		±		±	
RD-128128TSWIG01 Folding Type OEL Display		mm		mm		mm		mm		mm		mm		mm		mm		mm		mm	
Module Pixel Number:128 x 128, Monochrome, COG Package		mm		mm		mm		mm		mm		mm		mm		mm		mm		mm	
Soda Lime / Polyimide		mm		mm		mm		mm		mm		mm		mm		mm		mm		mm	
Scale		Sheet		Size		1 of 1		A3		1 of 1		A3		1 of 1		A3		1 of 1		A3	
Drawing Number		Rev.		A		Material		Soda Lime / Polyimide		Scale		Sheet		Size		1 of 1		A3		1 of 1	
Radiant-way Technology Inc.		RD-128128TSWIG01 Folding Type OEL Display		Module Pixel Number:128 x 128, Monochrome, COG Package		Soda Lime / Polyimide		Scale		Sheet		Size		1 of 1		A3		1 of 1		A3	

- Notes:
- Color: White
 - Driver IC: SH1107
 - FPC Number: UT-0607-P01
 - Interface: 8-bit 68CX80XX Parallel, 4-wire SPI, I2C
 - General Tolerance: ±0.30
 - The total thickness (1.3 Max) is without polarizer protective film & remove tape. The actual assembled total thickness with above materials should be 1.55 Max.