Item	Date	Remark
A	20071112	Original Drawing
B	20071122	Shrink Panel Size
C	20071126	Modify Active Area Position
D	20091214	Change Protective Tape Material

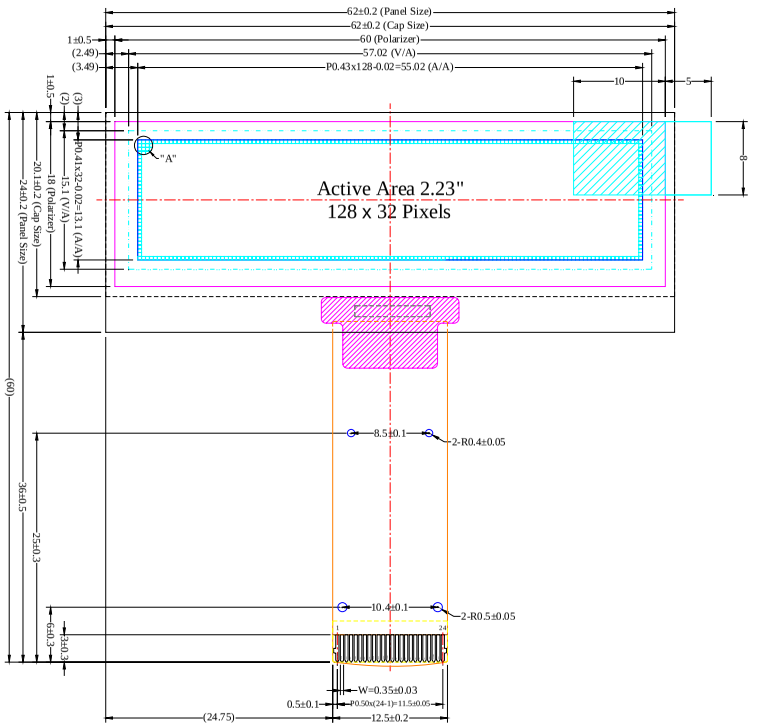

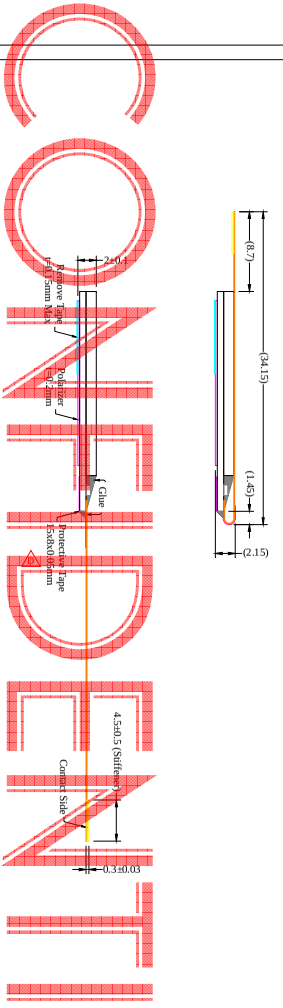





Pin	Symbol
1	N.C. (GND)
2	VLSS
3	VSS
4	N.C.
5	VDD
6	BS1
7	BS2
8	CS#
9	RES#
10	D/C#
11	R/W#
12	E/RD#
13	D0
14	D1
15	D2
16	D3
17	D4
18	D5
19	D6
20	D7
21	IREF
22	VCOMH
23	VCC
24	N.C. (GND)

Notes:

1. Color: Light Blue
2. Driver IC: SSD1305
3. FPC Number: UT-0205-P05
4. Interface:
   8-bit 68XX/80XX Parallel, 4-wire SPI, I2C
5. General Tolerance: ±0.30
6. The total thickness (2.10 Max) is without polarizer protective film & remove tape.
   The actual assembled total thickness with above materials should be 2.35 Max.

Customer Approval Signature	Radiant-way Electronic Technology Co. LTD					Drawing Number		Rev.
								D
	Unless Otherwise Specified		Title	RDL223-12832ALBCG01 Folding Type OEL Display Module Pixel Number: 128 x 32, Monochrome, COG Package			Material	
	Unit	mm					Soda Lime / Polyimide	
	General Roughness							
	Tolerance			Drawn	E.E.	Panel / E.	P.M.	
	Dimension	±0.3	By					Scale / Sheet / Size
	Angle	±1	Date	20091214	20091214	20091214	20091214	1:1 / 1 of 1 / A3