
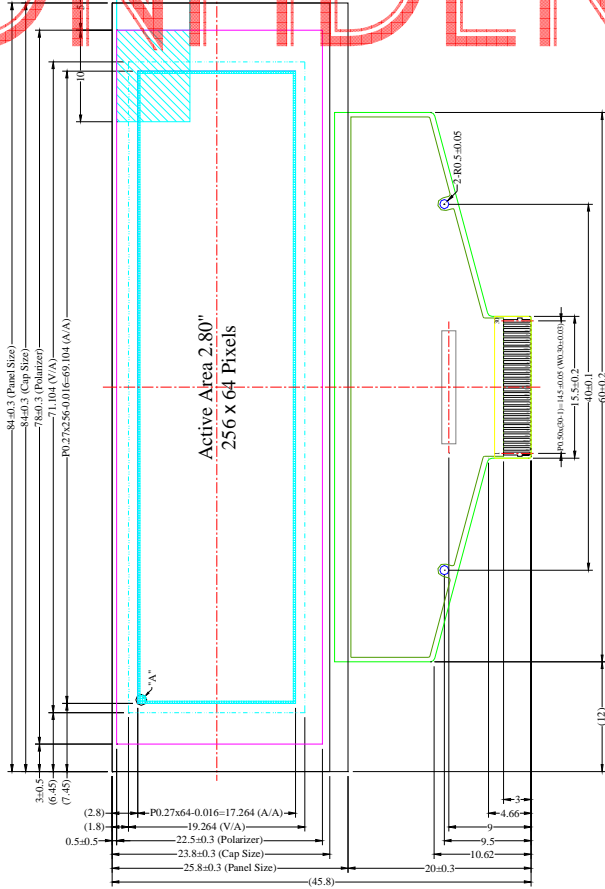

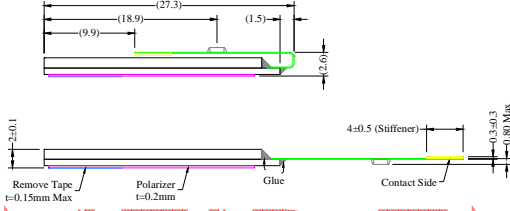


CONFIDENTIAL

Item	Date	Remark
A	20080401	Original Drawing
B	20091224	Modify Column 256 define & Interface



Pin	Symbol
1	N.C. (GND)
2	VSS
3	VDD
4	VCOMH
5	VGLSS
6	D7
7	D6
8	D5
9	D4
10	D3
11	D2
12	D1
13	D0
14	RS0P
15	RS0N
16	BS0
17	BS1
18	DC#
19	CS#
20	RES#
21	FR
22	IREF
23	N.C.
24	VDDO
25	VDD
26	VDD
27	VSL
28	VSSS
29	VCC
30	N.C. (GND)

Customer Approval Signature		Radiant-way Electronic Technology Co. LTD			
		RDL280-25664ALBDF01 Folding Type OEL Display Module Pixel Number: 256 x 64, Monochrome, COF Package			
Unless Otherwise Specified	Unit	mm			
	General Roughness	⊕			
Tolerance	±0.30	By			
Dimension	±1	Date	20091224	20091224	20091224
Angle		Panel / E.	E.E.	P.M.	
Drawing Number		Material		Scale	Sheet
B		Soda Lime / Polyimide		1:1	1 of 1
				Size	A3

Notes:

- Color: Light Blue
- Driver IC: SSD1322
- Die Size: 1237um x 1526um
- COF Number: SSD1322U
- Interface: 8-bit (8XX/80XX Parallel, 3-4-wire SPI)
- General Tolerance: ±0.30
- The total thickness (2.10 Max) is without polarizer protective film & remove tape. The actual assembled total thickness with above materials should be 2.35 Max.