


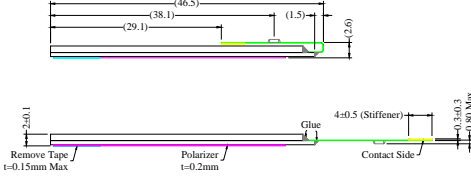


Item	Date	Remark
A	20090401	Original Drawing

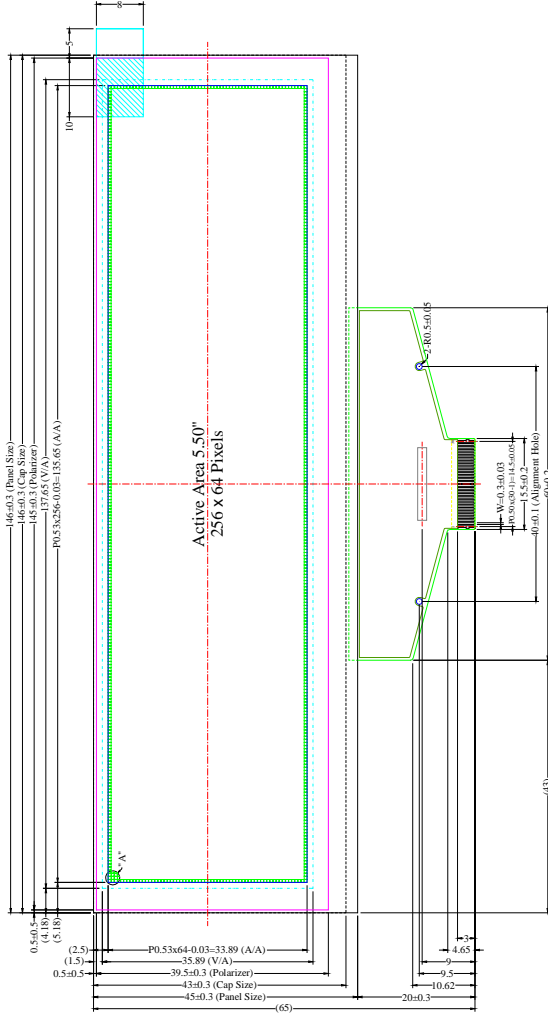

Pin	Symbol
1	N.C. (GND)
2	VSS
3	VCOMH
4	VCOML
5	VSS
6	D7
7	D6
8	D5
9	D4
10	D3
11	D2
12	D1
13	D0
14	E-RDP
15	R-WP
16	BSI
17	BSI
18	DCP
19	BSI
20	RSP
21	FR
22	RF
23	N.C.
24	VDDO
25	VDD
26	VCI
27	VSS
28	VSS
29	VCC
30	N.C. (GND)



Notes:

- Color: Green
- Driver IC: SSD1322
- Die Size: 12374um x 1526um
- COF Number: SSD1322U
- Interface: 8-bit 68XX/80XX Parallel, 3-/4-wire SPI
- General Tolerance: ±0.30
- The total thickness (2.10 Max) is without polarizer protective film & remove tape. The actual assembled total thickness with above materials should be 2.35 Max.

Customer Approval Signature	Radiant-way Technology Inc.		Drawing Number	Rev.
			A	A
Unless Otherwise Specified		Material		
Unit	mm	Soda Lime / Polyimide		
General Roughness		RDL550-25664ASGFF01 Folding Type OEL Display Module		
Title		Pixel Number: 256 x 64, Monochrome, COF Package		
Tolerance	±0.30	Drawn	E.E.	P.M.
Dimension	±0.30	By		
Angle	±1	Date	20090401	20090401
		Panel / E.	20090401	20090401
		E.E.	20090401	20090401
		Scale	1:1	1 of 1
		Sheet	A3	A3