


| | | | |
|-------|----------|-----|------------------|
| Sheet | Date | Rev | Drawn |
| A | 20100425 | | Original Drawing |

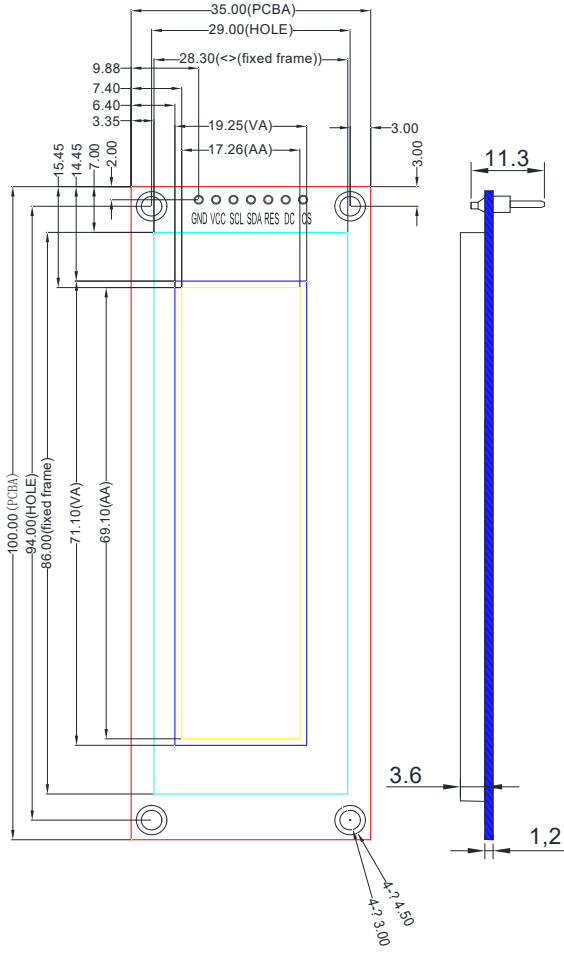

| Pin | Symbol |
|-----|--------|
| 1 | GND |
| 2 | VCC |
| 3 | SCL |
| 4 | SDA |
| 5 | RES |
| 6 | DC |
| 7 | CS |

- NOTES:
1. DISPLAY TYPE: 2.8" OLED
 2. VIEWING DIRECTION: ALL
 3. POLARIZER MODE: TRANSMISSIVE/NORMALLY BLACK
 4. DRIVER IC: SSD1322
 5. Resolution: 256x64
 6. GRAY SCALE: 16 GRAY SCALE DOT MATRIX
 7. INTERFACE: SPI
 8. VOLTAGE : 3.3V
 9. OPERATING TEMP: -40 ° C ~ 70 ° C

| | | | |
|---|------|---|------|
| Customer Approval | | Rediffusion Technology Inc. | |
| Signature | Date | Signature | Date |
| | | | |
| Part Number: 2104A | | Part No: 20100425 | |
| Revision: 1.1 | | Rev: 1.1 | |
| Material: Book/Lens/ Polyimide | | Material: Book/Lens/ Polyimide | |
| E.E. | | E.E. | |
| P.M. | | P.M. | |
| Date: 20100425 | | Date: 20100425 | |
| File: HQ-20090706021 PM OLED Display Module | | File: HQ-20090706021 PM OLED Display Module | |
| Drawn: 2104A | | Drawn: 2104A | |
| Checked: 2104A | | Checked: 2104A | |
| Approved: 2104A | | Approved: 2104A | |